


A FULLY SKILLED MOTOR MANUFACTURER STARTS THE REVOLUTION IN THE LIFT MARKET

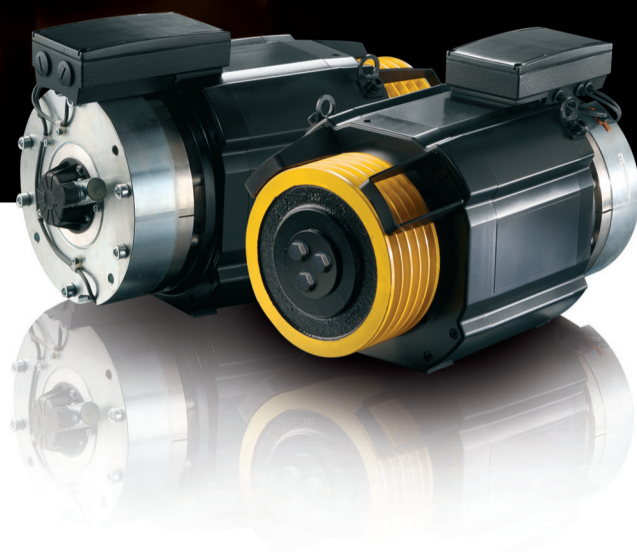

- Full range with torque 140 to 660 Nm for payload 240 to 1275 kg in roping 2:1 and 1:1
- Single-phase and three-phase drive supply
- Speed: 0,5m/s to 1,6m/s
- IP64 absolute and incremental encoders (Endat-sincos-HTL-TTL)
- Brakes in compliance with the EN81-1 Specifications and 95/16/EC Directive
- High efficiency, reduced energy consumption
- Compact design, reduced overall dimensions

Available on demand:

- Double coil brakes for maximum safety due to electrical redundancy
- Brakes with cURus Certification and in compliance with ASME A17 Safety Code for the North American market
- Brakes with inductive proximity switches, in order to guarantee maximum reliability even in critical environments and for heavy applications
- Brakes with hand release with reduced overall dimensions

 **LAFERTGROUP**

50[°] SINCE
1962